10. Designation of Main Components

10-1 Normal / Reverse Revolution of Motor and R. P. M. Control

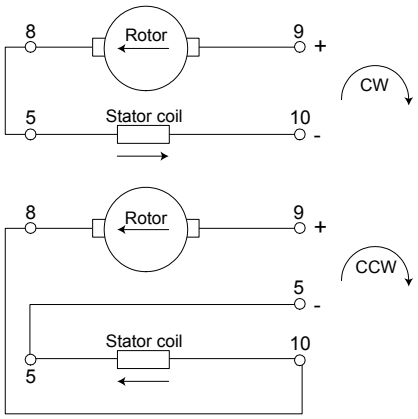

<Figure1>

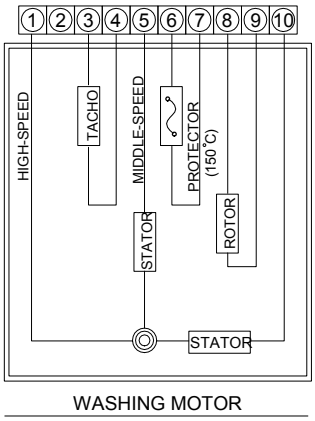

<Figure2>

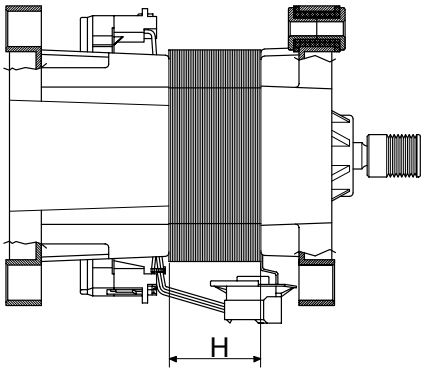

<Figure3>

(± 7%)	STATOR(51)	ROTOR(8.9)	TACHO(3.4)	PROTECTOR(6.7)	"H"(mm)	Code-No.	Remark
Resistance value	2.08Ω	1.99Ω	38.8Ω	0	30	DC31-00002H	S821
Rated value	220~240V/50Hz						

10-2 Door safety Device

When Door is closed, door stay closed. if "set" is operated, power supplied to Ⓝ , Ⓛ wires have bymetal keep the door closed, and electronical power flows between Ⓛ and Ⓒ make it operate.

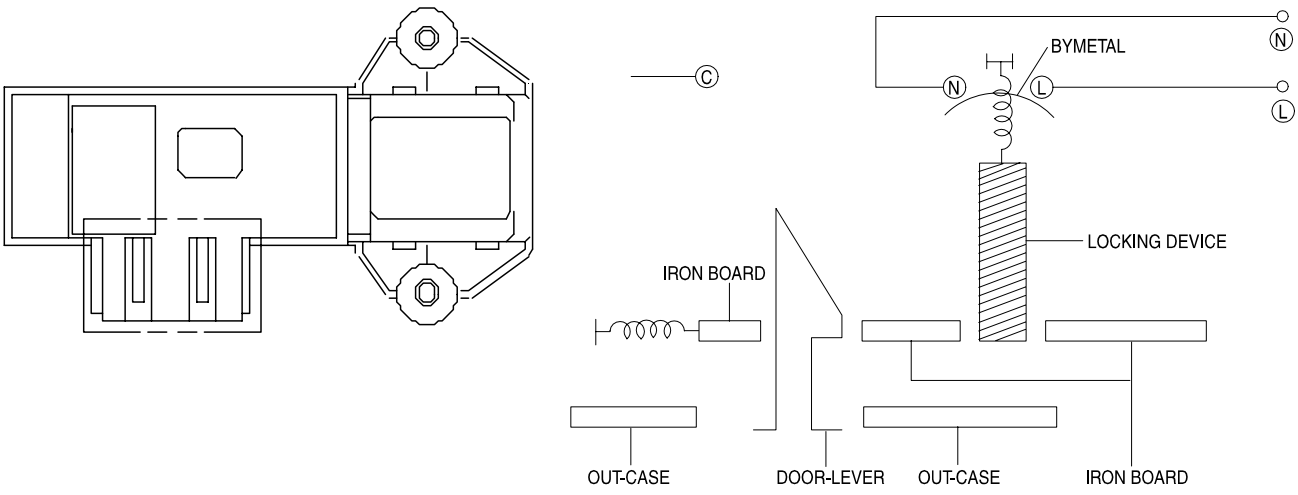

10-3 Heater

1) Capacity : AC 230V/800W
2) Location : Bottom of TUB
3) Function : Raise the water temperature
supplied at the wash process.
4) Resistance value : 62.63~69.22 Ω
5) Thermal Fuse : 128°C

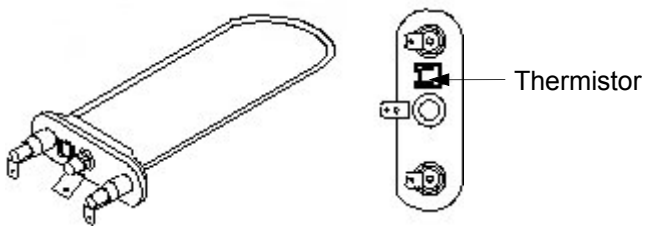

10-4 Detergent tub and water supply value

A Detergent tub is composed of housing and 3 drawers . supplied water flows into the 3 drawer-detergent tub by way of classifier at each washing process.

three open drainage way whith detergent and supplied water by way of connector located under the housing flows into washing tub.

the water supply valve is composed of a hot water valve(1 way) and a cold water valve(3way) and water flow per min in the valve is below.

	Hot water valve(1 way)
water flow(L/min)	10L
resistance value	4.3kΩ
power consumption	AC 220v ~ 240V 50/60Hz
usable water pressure	0.5 ~ 8 kg/㎠

10-5 Shock absorber and buffer spring

This wash machine is equipped with 2 Shock absorbers with same capacity and with 2 buffer springs. 2 Shock absorber are placed under the tub and outside case , 4 buffer springs are placed on the right and left of the upper side of outside case.

Shock absorber function: during wash, dehydration absorb the shock.

buffer spring: buffering the vibration

device	capacity of Shock absorber
Shock absorber	8±2kg

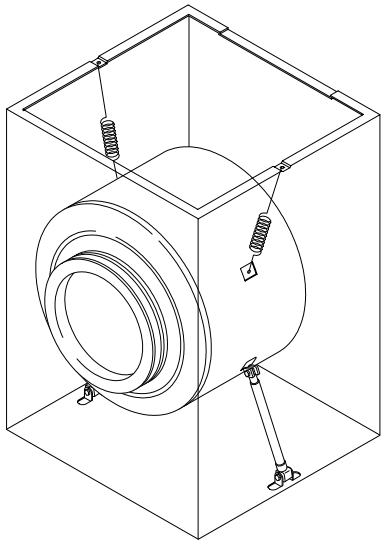

10-6 ASSY-TUB BACK

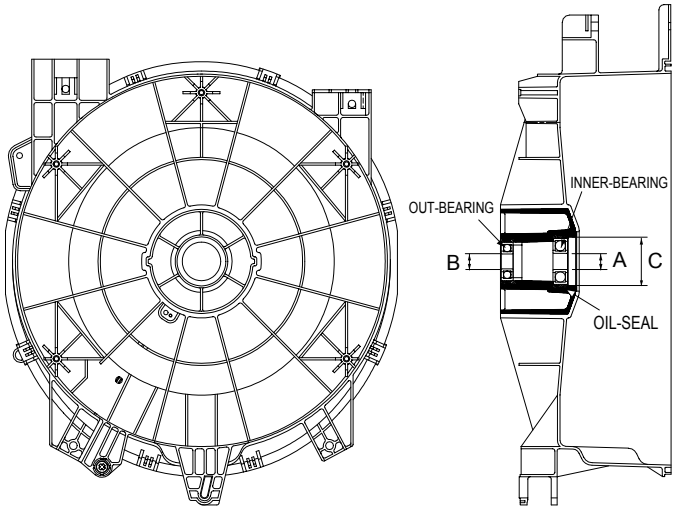

(unit : mm)

TYPE	INNER-BEARING(A)	OUT-BEARING(B)	OIL-SEAL(C)	Assy-Housing Bearing(D)	Assy-Tub Back
I	ø 20	ø 17	ø 24.3	DC97-02133A	DC97-02137B

10-7 ASSY- DRUM

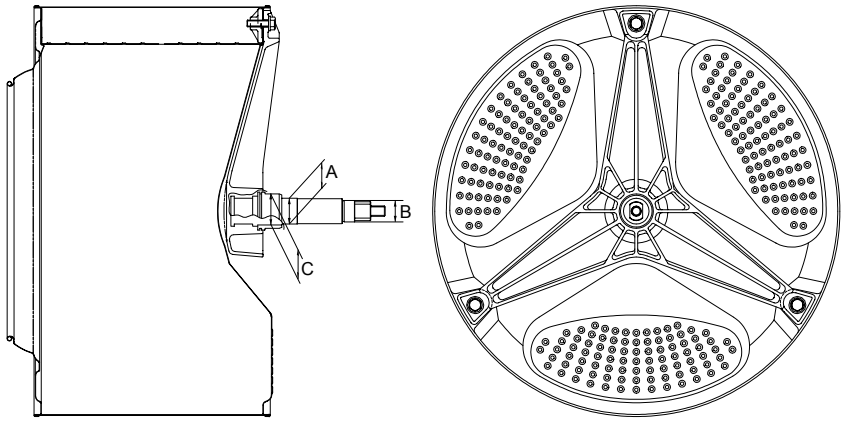

(unit : mm)

TYPE	(A)	(B)	(C)	CODE-NO.	REMARK
I	ø 20	ø 17	ø 25	DC97-02099B	Lifter type S821/S621

10-8 ASSY-PUMP DRAIN
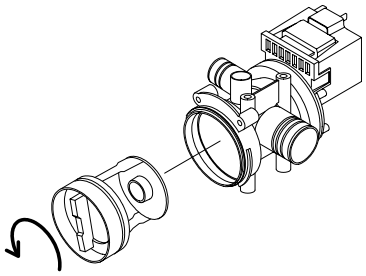
1) Capacity : AC 230V 34W
2) Location : Front bottom(R)
3) Resistance : 150Ω ~ 180Ω